

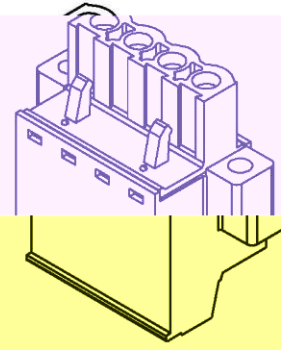
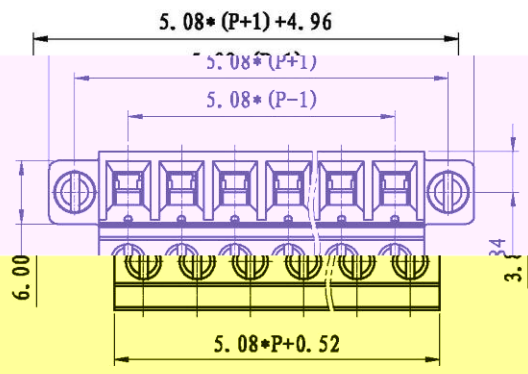


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	增加脱模斜度	XLM	2012/02/10
②	第一次增加无效果, 再次增加脱模斜度	XLM	2012/02/22
③	增加螺丝和螺母的规格, 改牙长度	LDD	2013/07/29
④	防止螺丝在使用中倾斜	LDD	2013/11/08
⑤	改善盖板为主体的匹配	LDD	2014/12/10



- NOTES:
1. Voltage Rating: 300V, Current Rating: 15A
 2. PITCH: 5.08mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Insulation Resistance: 5MΩ or more at DC500V
 5. Using Temperature Range: -40° C - +105° C
 6. Suitable Electric Wire: 30-12AWG
 7. Screw Torque Value: 0.4Nm



- 技术要求:
1. 额定电压: 300V, 额定电流: 15A
 2. 间距: 5.08mm
 3. 耐电压值: AC 2500V/min
 4. 绝缘电阻: 5兆欧
 5. 使用条件: -40° - +105°
 6. 适用线规: 30-12AWG
 7. 扭矩值: 0.4Nm

