
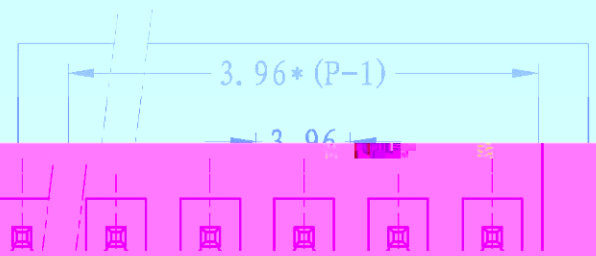
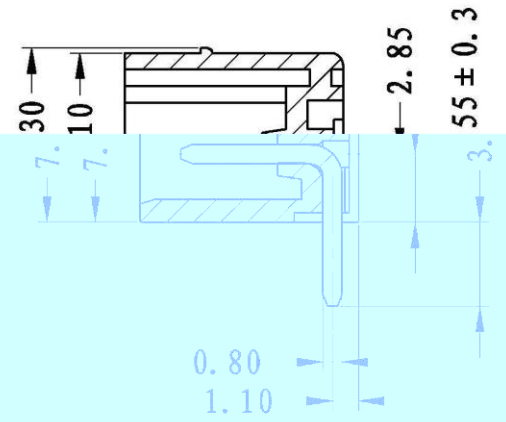


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	新发行		

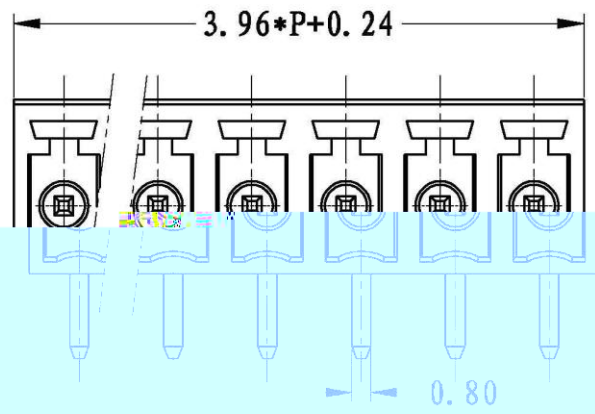

**NOTES:**

1. Voltage Rating: 300V, Current Rating: 8A
2. PITCH: 3.96mm
3. Insulation Withstands Voltage: AC3000V/min
4. Insulation Resistance: 1000M $\Omega$  or more at DC500V
5. Using Temperature Range: -40 $^{\circ}$ C - +105 $^{\circ}$ C

**技术要求:**

1. 额定电压: 300V, 额定电流: 8A
2. 间距: 3.96
3. 耐电压值: AC 3000V/min
4. 绝缘阻抗1000兆欧
5. 使用条件: -40 $^{\circ}$  - +105 $^{\circ}$

variable range	over				all	over					over					
	to	to	to	to		to	to	to	to	to	to	to	to	to		
6	30	120	240	480	6	10	50	120	5	30	120	0.3	0.025	0.06	0.12	0.4

DES.	arkine	DATE	11-07-5	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	2:1	DWG NO.	SP-1-1049001
上海联捷电气有限公司 Shanghai Hlinker Electric Co., LTD						TITLE	LZ1R-3.96-XXP-140-00A
							LZ1R-3.96