


REVISION		RECORD	
RBV.	CONTENT	MOD.	DATE
△	初版发行		






NOTES:
 Pitch : 3.81mm
 Rated Voltage : 300V
 Rated Current : 8 A
 Withstand Voltage :

技术要求:
 间距: 3.81mm
 额定电压: 300V



5MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃

绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃ ~ +105℃

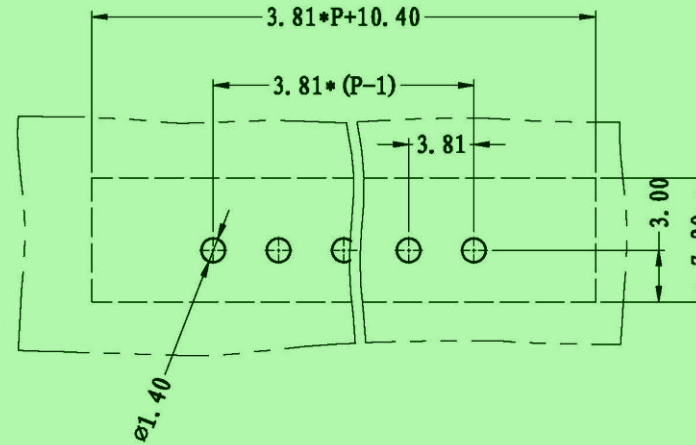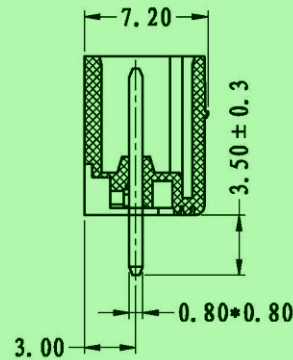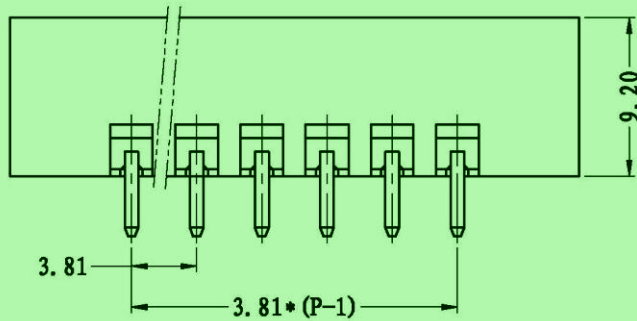

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1-耳朵螺母	SMO0B250000V	2	黄铜	
2	LZ1-3.81-直针	1003R0001AY	P	黄铜	镀雾锡
1	LZ1M-3.81-本体	1003M0TXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/7/21	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1003001
				REV.	Y0
				TITLE	LZ1VM-3.81-XP-1Y-00A
					LZ1VM-3.81-成品

上海联捷电气有限公司
 Shanghai Hlinker Electric C.O.,LTD