





REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

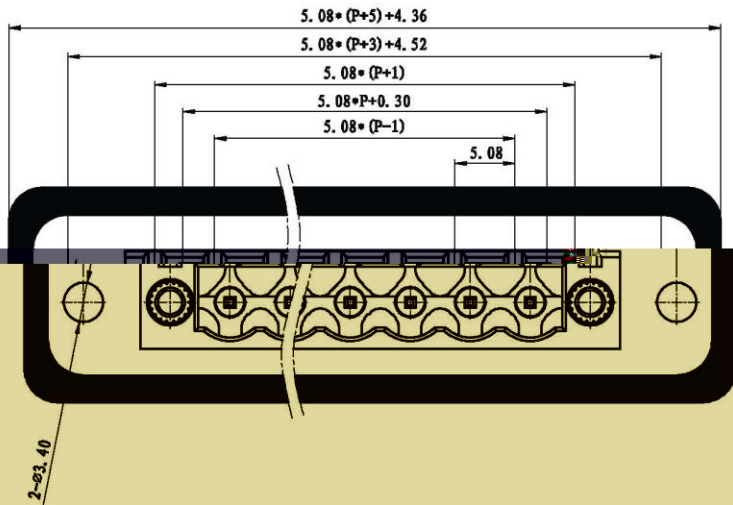

NOTES:

Pitch: 5.08mm
 Rated Voltage: 300V
 Rated Current: 15A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 5MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃~+105℃

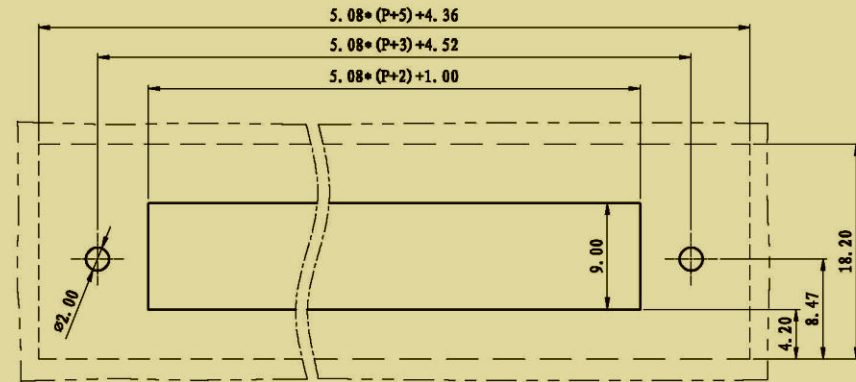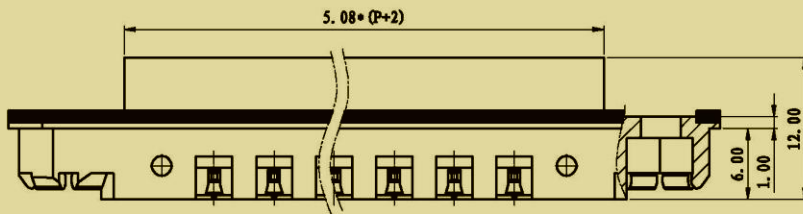

	pitch dimension			Nominal dimension					Tolerance
	over 0	over 5	over 10	over 30	over 60	over 100	over 150		
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150	0.05/10	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	密封圈	MFQ0001AV	1	EVA板材	环保
4	LZ1-耳朵螺母	SMO0B250000V	2	黄铜	
3	M3外六角螺母	SW00A300003V	2	碳钢	镀锌
2	LZ1-5.08-弯针(1.2)	1015B0001AV	P	黄铜	镀雾锡
1	LZ1FCRM-5.08-本体	1129M0YXXAV	1	PA66-Y0	

DBS.	YTX	DATE	2014/07/23	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO. SP-2-1129002	REV: V0

上海联捷电气有限公司
Shanghai Blinker Electric C.O., LTD

TITLE LZ1FCRM-5.08-III-1Y-00A
LZ1FCRM-5.08-成品