


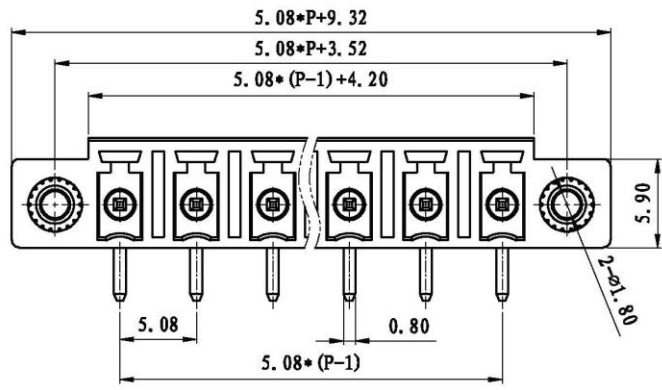


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

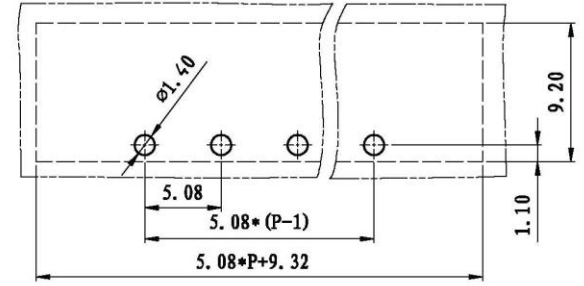

NOTES:  
 Pitch: 5.08 mm  
 Rated Voltage: 300V  
 Rated Current: 8A  
 Withstand Voltage:  
 AC2500V for 1 minute  
 Insulation Resistance:  
 5MΩ / DC500V  
 Using Temperature Range:  
 -40℃ ~ +105℃

技术要求:  
 间距: 5.08mm  
 额定电压: 300V  
 额定电流: 8A  
 耐压值: AC2500V/min  
 绝缘阻抗: 5MΩ/DC500V  
 使用条件: -40℃~+105℃

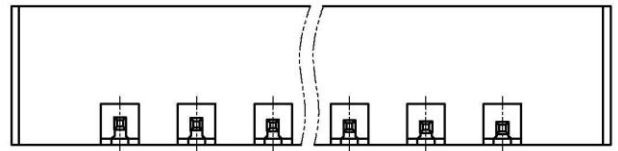

3	LZ1-耳朵螺母	SM00B250000V	2	黄铜	
2	LZ1-3.81-弯针	1003B0002AV	P	黄铜	镀锡

NO.	NAME OF PART	NO. OF PART	QTY.	MATERIAL	NOTES
DES.	DATE	1912/11/25	UNIT	mm	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A3	1 OF 1
APP.	DATE		SCALE	1:1	DWG. NO. 01-11-00003 000-V3
				上海聚捷电气有限公司	FILE 121124-1 01-11-17-001