



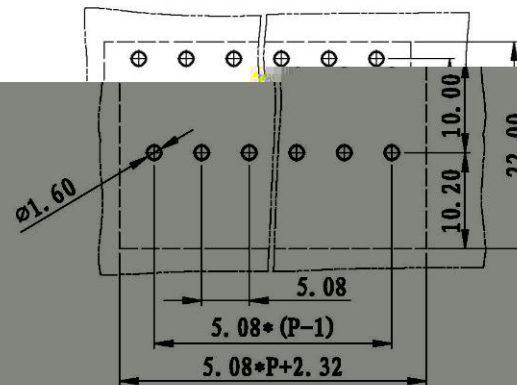


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

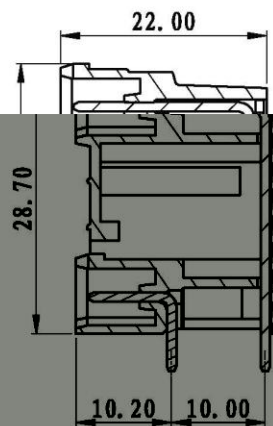

NOTES:
 Pitch : 5.08 mm
 Rated Voltage : 300 V
 Rated Current : 15A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐电压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃ ~ +105℃

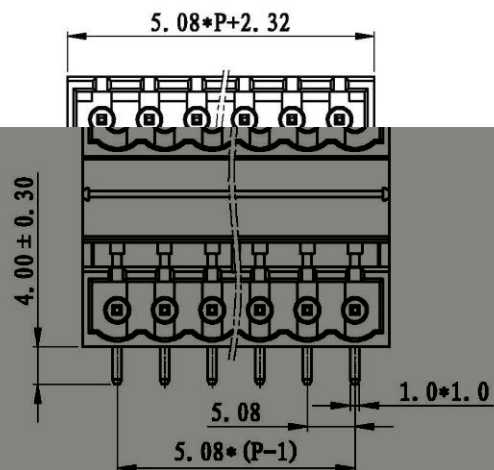

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇
Tolerance	+0.1	+0.15	+0.25	+0.2	+0.3	+0.5	+0.7	+1.0	○

4	LZ3H-5.08-长弯针	1031B0001AV	P	黄铜	镀锡铜
3	LZ1-5.08-弯针(1.3)	1015B0008AV	P	黄铜	镀锡铜
2	LZ3H-5.08-盖板	1032C0YXXAV	1	PA66	
1	LZ3H-5.08-主体	1031A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	ARKINE	DATE	2011/11/28	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	
				DWG NO.	SP-2-1031004
					REV: V0
				TITLE	LZ3RH-5.08-2*XXP-1Y-00A

上海联捷电气有限公司