


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行	LDD	2011/10/23



NOTES:
 Pitch : 5.0mm
 Rated Voltage : 300 V
 Rated Current : 10A
 Withstand Voltage: AC2500V for 1 minute
 Insulation Resistance :5MΩ / DC500V

技术要求:
 间距: 5.0mm
 额定电压: 300V
 额定电流: 10A
 耐电压位: AC2500V/min
 绝缘电阻: 5MΩ / DC500V

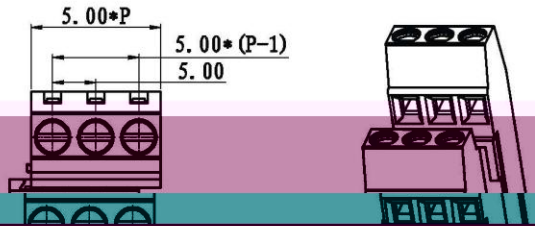

	pitch dimension			Nominal dimension					□
	over	over	over	over	over	over	over	over	
variable	0	6	10	0	30	60	100	150	

7	10-平头铜丝	SP0YA255101Y	3P	黄铜	三价铜钝化
6	10118-铜方块	F1A08L01283V	3P	黄铜	镀锡
5	10300-长焊脚	2044B0001AY	P	黄铜	镀厚锡
4	10300-中焊脚	2042B0002AY	P	黄铜	镀厚锡
3	10118-7焊脚	2013B0001AY	P	黄铜	镀厚锡
2	103000-2.0-平头	2044A011XAY	1	PAGE	
1	1030000-2.0-平头	2043A011XAY	1	PAGE	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	DATE	2011/10/23	UNITS	mm	THIRD ANGLE PROJECTION
CHK	DATE		SIZE	A4	