
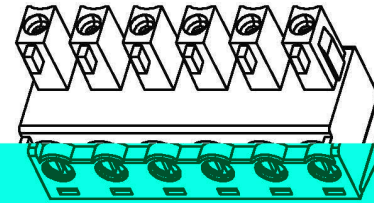


REVISION RECORD

REV.	CONTENT	MOD.	DATE
①	初版发行		

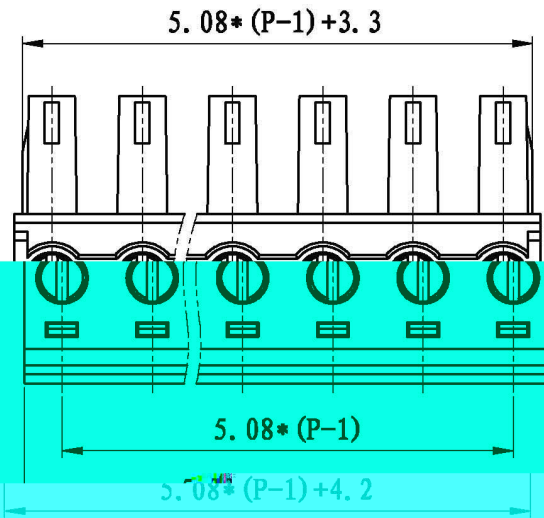

NOTES:
 Pitch : 5.08mm
 Rated Voltage : 300V
 Rated Current : 8 A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃
 Wire range : 28~16AWG
 Screw Torque Value : 0.2Nm

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 8A
 耐电压值: AC2500V/min
 绝缘电阻: 5MΩ/DC500V

2011.8.31.011