

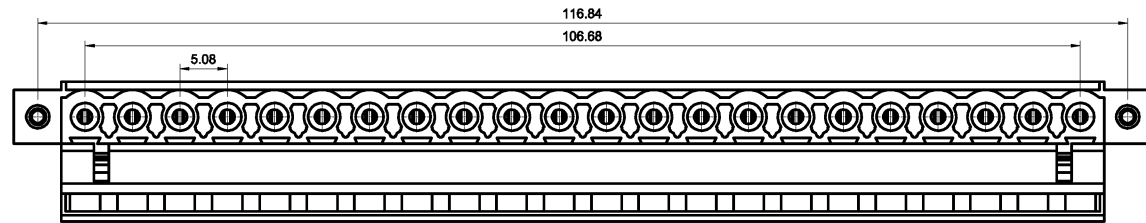


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
▲	初版发行		



- NOTES:**
1. Voltage Rating: 300V, Current Rating: 15A
 2. PITCH: 5.08mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Insulation Resistance: 500M Ω or more at DC500V
 5. Using Temperature Range: -40° C - +105° C
 6. Suitable Electric Wire: 28-12AWG
 7. Screw Torque Value: 0.5 N.m

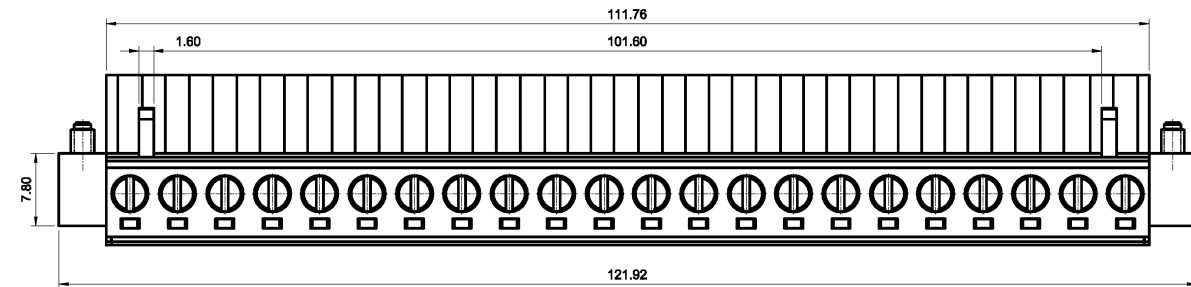

- 技术要求:**
1. 额定电压: 300V, 额定电流: 15A
 2. 间距: 5.08mm
 3. 耐压电压: AC 2500V/min
 4. 绝缘电阻: 500兆欧
 5. 使用条件: -40° - +105°
 6. 适用线规: 28-12AWG
 7. 扭矩值为: 0.5 N.m

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6.	LC1-耳朵螺丝	SPOYA255302V	2	碳钢	镀锌	
5.	LC1-5.08-夹子	1001B0001AV	22	磷青铜	镀锌	
4.	LC1-5.08-铜方块	F1A0BLC5083V	22	黄铜	镀锌	
3.	LC1-5.08-螺丝	SPOYA305302V	22	碳钢	三价铬钝化彩锌	
2.	LC1-5.08-盖子	1001C4022AV	1	PA66-V0	绿色	
1.	LC1M-5.08-主体	1001M4022AV	1	PA66-V0	绿色	
NO.	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/5/24	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	
APP.		DATE		SCALE	1:1	
				DWG NO.	SP-1-10010A01	REV: V0
上海联捷电气有限公司 Shanghai Blinkor Electric C.O., LTD					TITLE	LC1M-5.08-22P-140-00A
						LC1M-5.08-成品