

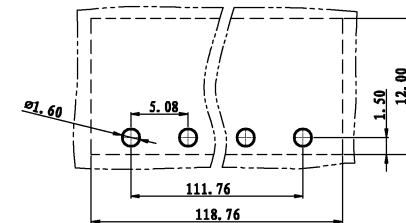
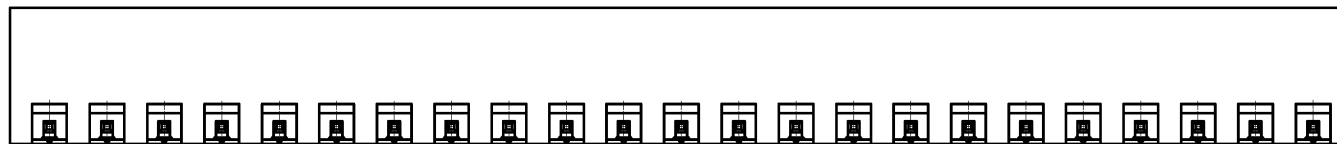


REVISION RECORD

REV.	CONTENT	MOD.	DATE
△	初版发行		

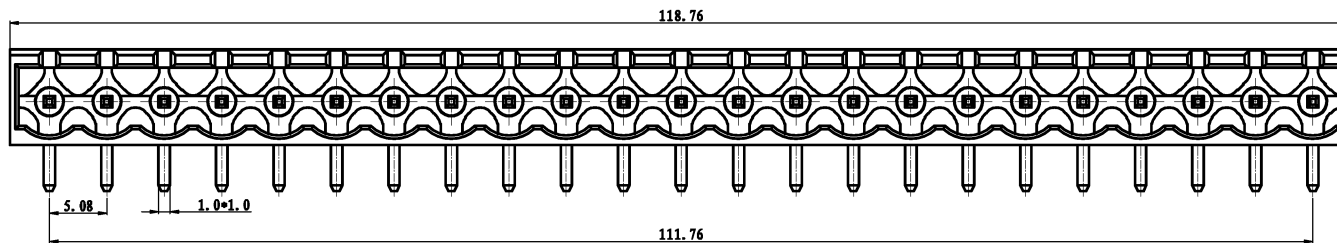

NOTES:
 Pitch : 5.08mm
 Rated Voltage : 300V
 Rated Current : 15A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 1000M Ω / DC1000V
 Using Temperature Range :
 -40 $^{\circ}$ C ~ +105 $^{\circ}$ C
 Flame retardant rating:
 V0



技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐电压值: AC2500V/min
 绝缘阻抗: 1000M Ω /DC1000V
 使用条件: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C
 阻燃等级: V0