

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 30-12AWG
7. Screw Torque Value: 0.5 N.m以上

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐压值: AC 2500V/min
4. 绝缘阻抗: 500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 30-12AWG
7. 螺丝扭力: 0.5 N.m以上

LC1-5.08-螺丝	SP0YB305503V	P	碳钢	三价铬钝化彩锌
LC1-5.08-铜方块	F1A0BLC5083V	P	黄铜	镀镍
LC2-5.08-夹子	1006B0001AV	P	磷青铜	镀镍
2-5.0-盖子	1124C0YXXAV	1	PA66-V0	
	1124A0YXXAV			


	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	○

CHK. DATE
APP. DATE
SCALE A4
DWG NO. SP-1-1124A002
REV: V0



上海联捷电气有限公司
Shanghai Elinker Electric C.O., LTD

SHEET of
TITLE

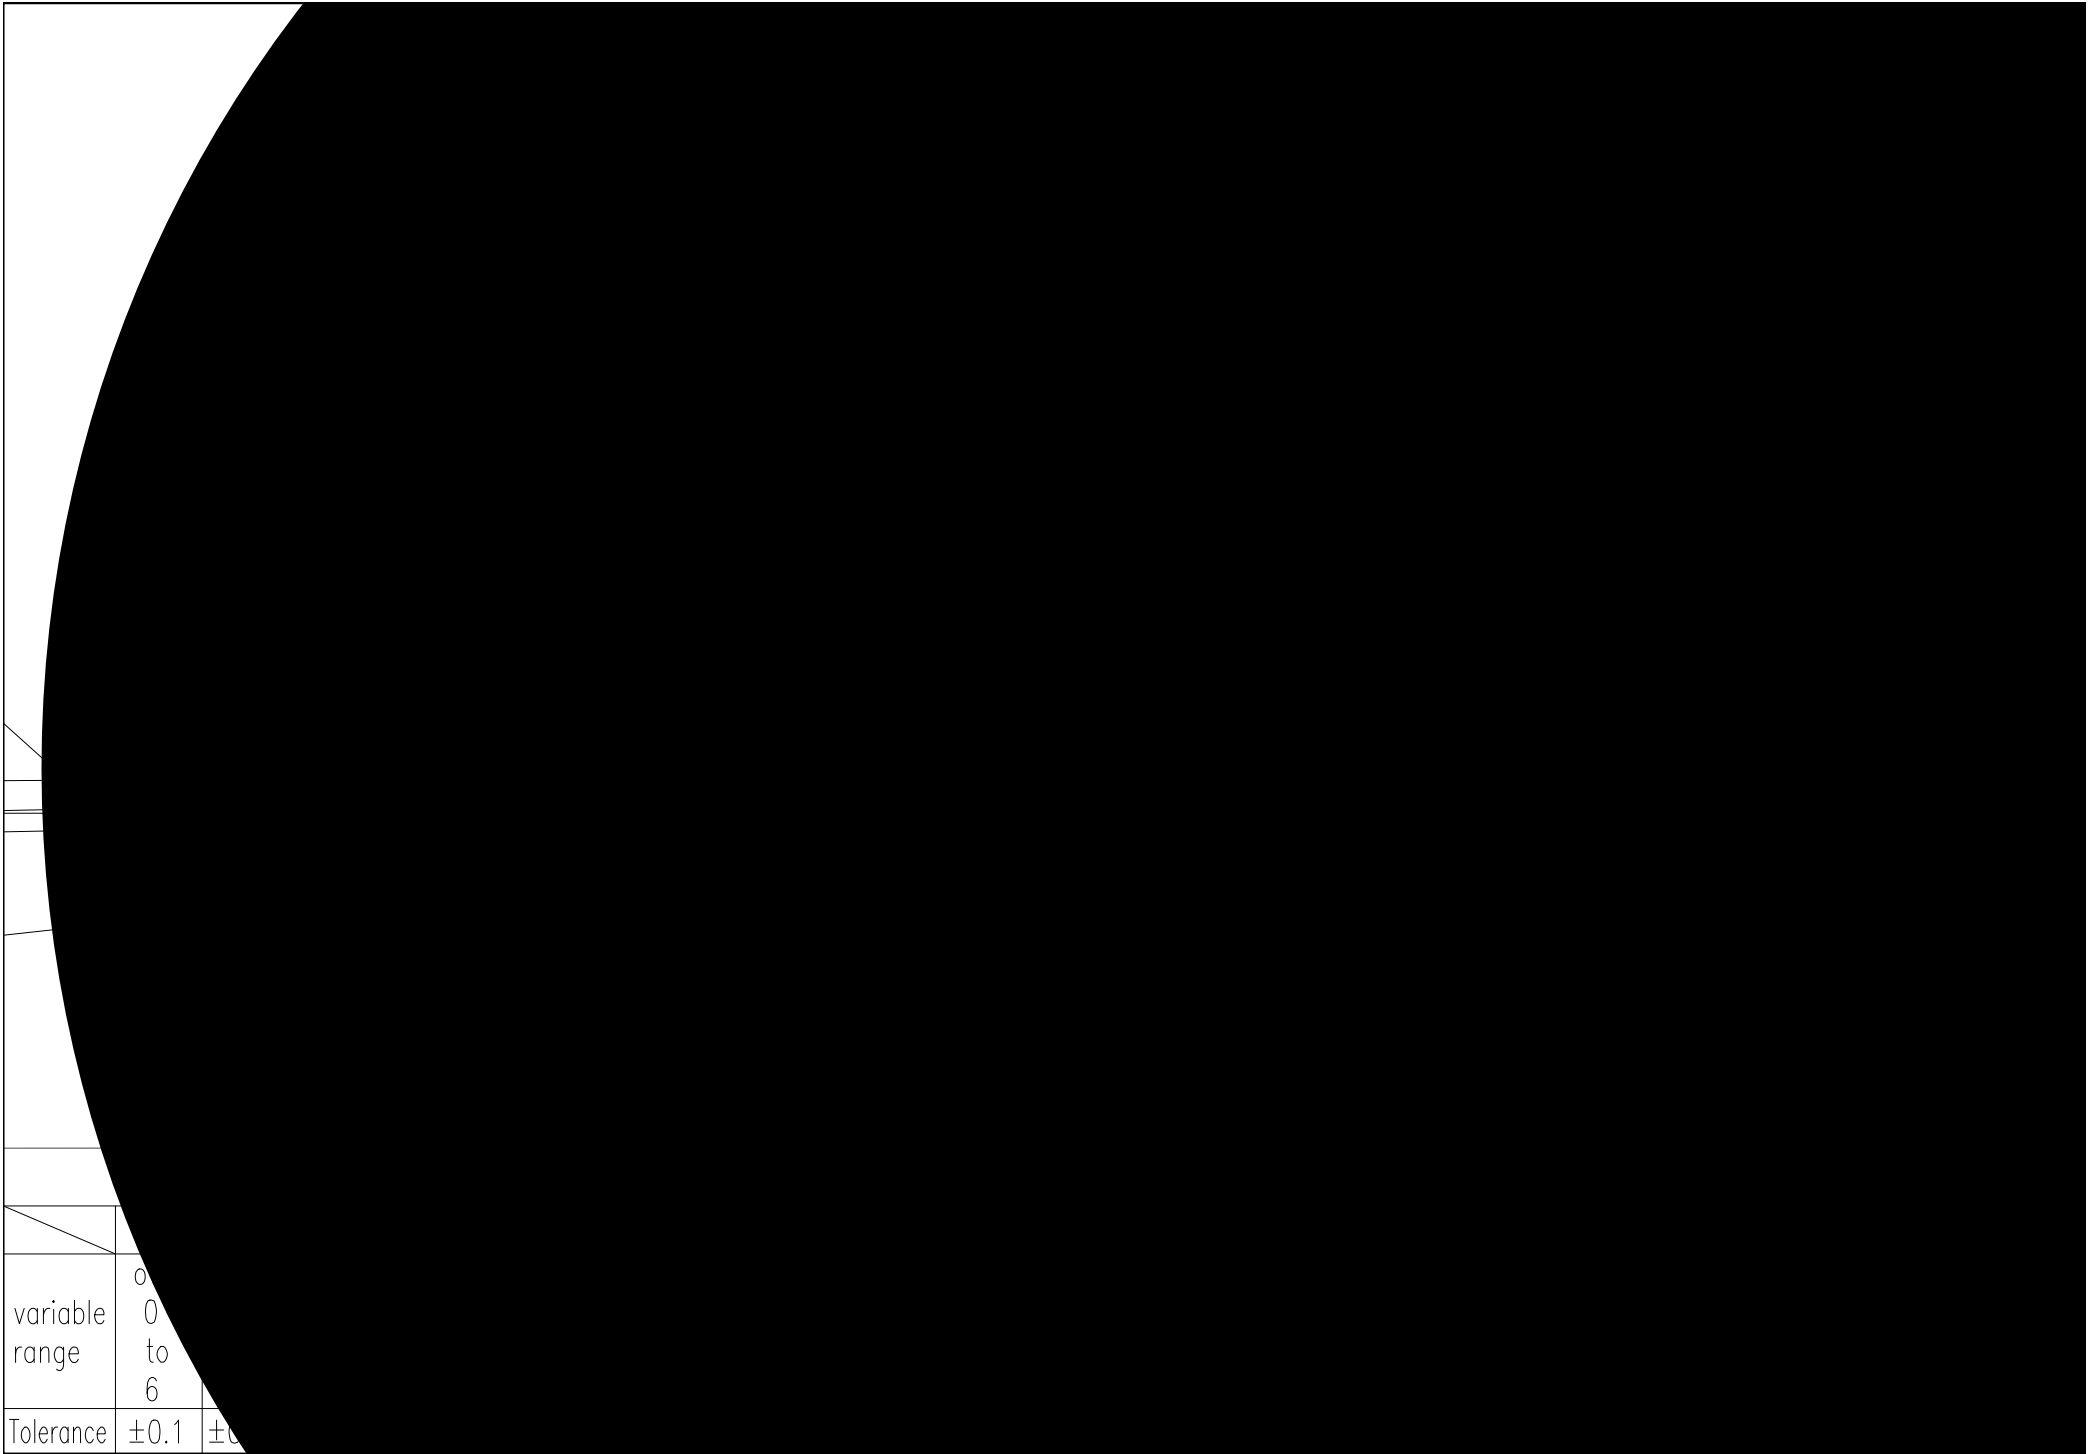

variable range	0 0 to 6	
Tolerance	± 0.1	± 0